



TASKER LN

Sewer main


Replace 84-foot section, anchor with eight (8) concrete collars every 14 feet, see detail 4'X90' = 360 sf LOD Temporary water containers will be used for cofferdam, no sand bag diversion and fill proposed

MHWL


Gabion basket breakwaters 6'X18' = 108 sf X 5 = 540 sf LOD Elevation = 2.5 ft, six inches above MHW R4 rock = 12" size marine grade baskets No more than 12 ft channelward of sewer main Temporary water containers will be used for cofferdam, no sand bag diversion and fill is proposed



0 25 50 100 Feet

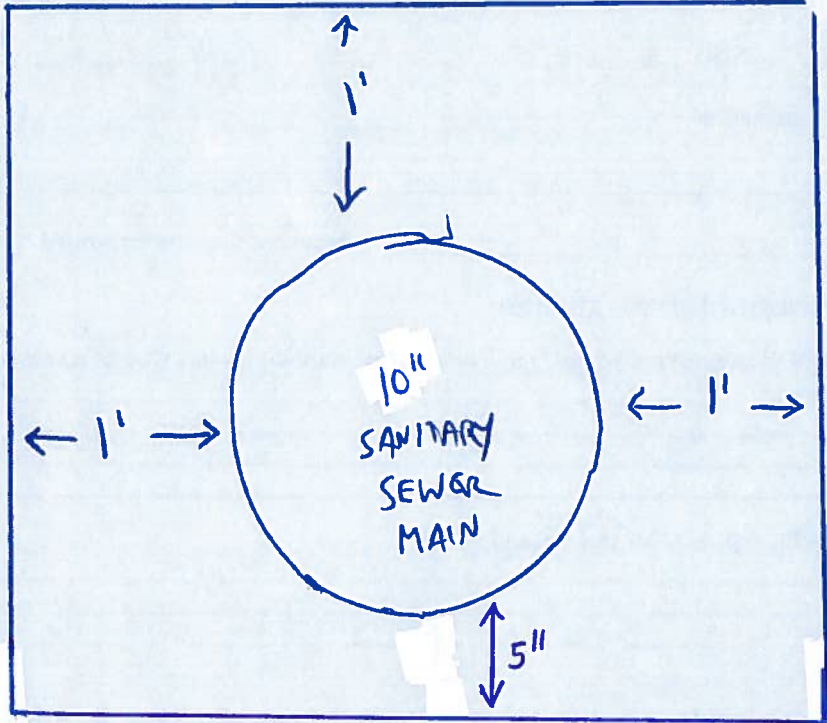




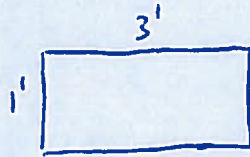

FROM WEST

HOOVES HOLDING BASKETS TOGETHER

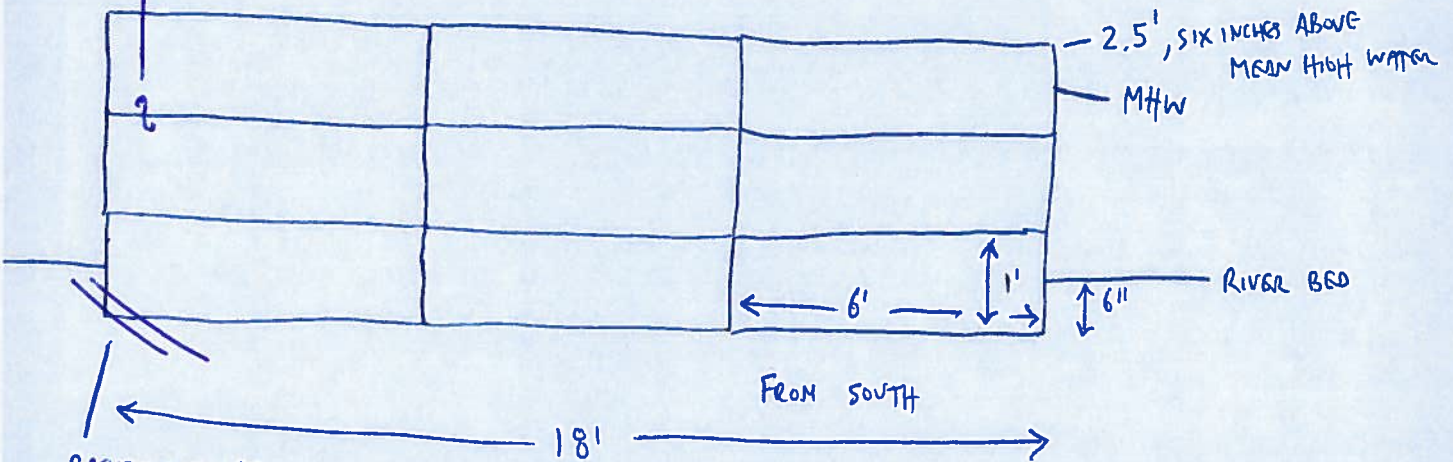

BASKETS WILL BE ADEQUATELY ANCHORED